



PREMIUM ANALYSE

M ionixTM

Mobile Tritium Detector

Mobile tritium detector for radioprotection, process control, environment monitoring, laboratory, decommissioning



FEATURES

- **Performance**
 - Continuous measurement
 - Response time under 3 min
 - Detection of tritium from 10 kBq/m³
- **Easy to use**
 - Ready to connect
 - Minimal intervention
 - User-friendly interface
- **Safe**
 - Auto-checking
 - Light and sound alarms
- **Mobile**
 - Lifting rings
 - Carrying handles
 - Rugged aluminum casing
 - Easily movable even on uneven surfaces

DESCRIPTION

The mobile tritium detector M ionix is used for continuous monitoring of tritium levels and other beta emitter gases in ambient air.

Thanks to its very good sensibility, its user-friendliness and its reliability, the M ionix mobile detector ensures the radioprotection of your teams and your premises, during construction, dismantling or as a temporary replacement of a fixed monitor.

The M ionix benefits from the most advanced technologies developed by Mirion Technologies (PREMIUM Analyse) :

- HEPA filtration system,
- DT ionix 3 interface with digital touchscreen,
- Beta activity transmitter EXP - 40 with high sensitivity preamplifier.

Ready to use, the M ionix mobile detectors offers some of the most advanced functionalities such as: graphical plotting of data, data archiving, alarm carryover, data extraction via USB stick, etc.

TECHNICAL CHARACTERISTICS

The mobile M ionix monitors are available in several versions :

The versions below are intended for continuous measurement of tritium activity and other β emitters in gases :

Measurement characteristics in laboratory conditions (given for tritium)	M IONIX 2 - XQS Tritium measurement with manual gamma compensation	M IONIX 2 - XCS Tritium measurement with automatic gamma compensation
Measurement range	2.1 kBq/m ³ to 2.1 TBq/m ³ 54 nCi/m ³ to 54 Ci/m ³	2.1 kBq/m ³ to 2.1 TBq/m ³ 54 nCi/m ³ to 54 Ci/m ³
Limit of detection (2 σ) = decision threshold	10 kBq/m ³	15 kBq/m ³
Limit of detection (4 σ)	20 kBq/m ³	30 kBq/m ³
Precision	5% of the measurement \pm 10 kBq/m ³	5% of the measurement \pm 15 kBq/m ³
Maximum deviation	10 kBq/m ³ / year	15 kBq/m ³ / year
Noise (2 σ)	\pm 10 kBq/m ³	\pm 15 kBq/m ³
Response time	< 3 min at 90% of full scale	
Ionization chamber(s)		
Volume	4200 cc	2 x 4200 cc
Nominal flow	20 L/m	20 L/m
Ionization voltage	160 VDC	

Operating conditions

- Use temperature: 0 to 40°C
- Influence of temperature: 0.3% /°C for an ambient temperature < 3°C / hour
- Humidity: from 5 to 95% rel.
- Influence of humidity: \pm 1% of the measurement from 10 to 90% relative humidity
- Atmospheric pressure influence: 0.1%/mbar, hence \pm 5% of the measurement 930 to 1030 mbar

COMMON CHARACTERISTICS


Every monitor integrates a DT ionix digital interface with touchscreen providing local display of the values through a user-friendly interface:

- 4 customizable alarm thresholds
- Digital display of volumetric activity
- Archiving of 32 days of measurement
- Data extraction and software update via USB stick
- Possibility to monitor the flow with low-flow detection
- Graphical plotting of measurements and alarms from 8 minutes to 8 days
- Choice and ability to personalize units used (Bq/m³, Ci, RCA, LPCA, DAC...)
- Light and sound signals when pre-alarm (orange) and alarm (red) threshold are exceeded, as well as good operation default




POSSIBLE CONFIGURATIONS

- Global characteristics:
 - Dimensions (with lights): W 600 x H 1000 x d 500 mm
 - Weight (approx.): 70 kg
 - Network: Ethernet Modbus connection via RJ45 connector
 - Alarms: 2 alarm outputs (24V / 80mA per signal)
- Electrical characteristics:
 - Power supply: 85 - 264VAC, 50/60Hz
 - Max power: 120W
 - Electrical protection: 6A differential breaker with C curve
- Several possible options:
 - Remote alarm beacon
 - Gas I/O via self-sealing Staubli connectors
 - Process output with dry-contacts, 4/20mA outputs,...
 - Light and sound alarms
- Filtration:
 - "FXS" option: 20µ anti-dust filtration
 - "TXS" option: V.H.E HEPA filtration
- Measurement:
 - "XQS" option: with flowmeter and simple measurement
 - "XCS" option: with flowmeter and compensation chamber

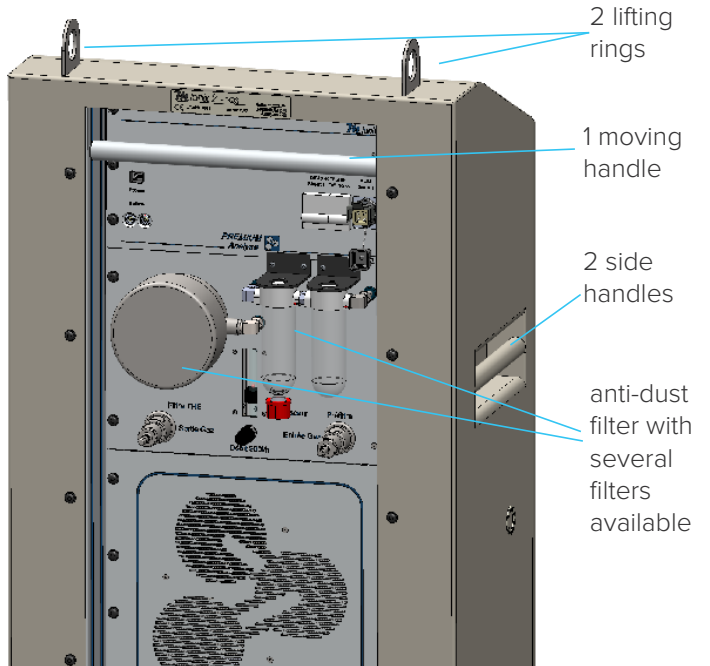

TXS Version

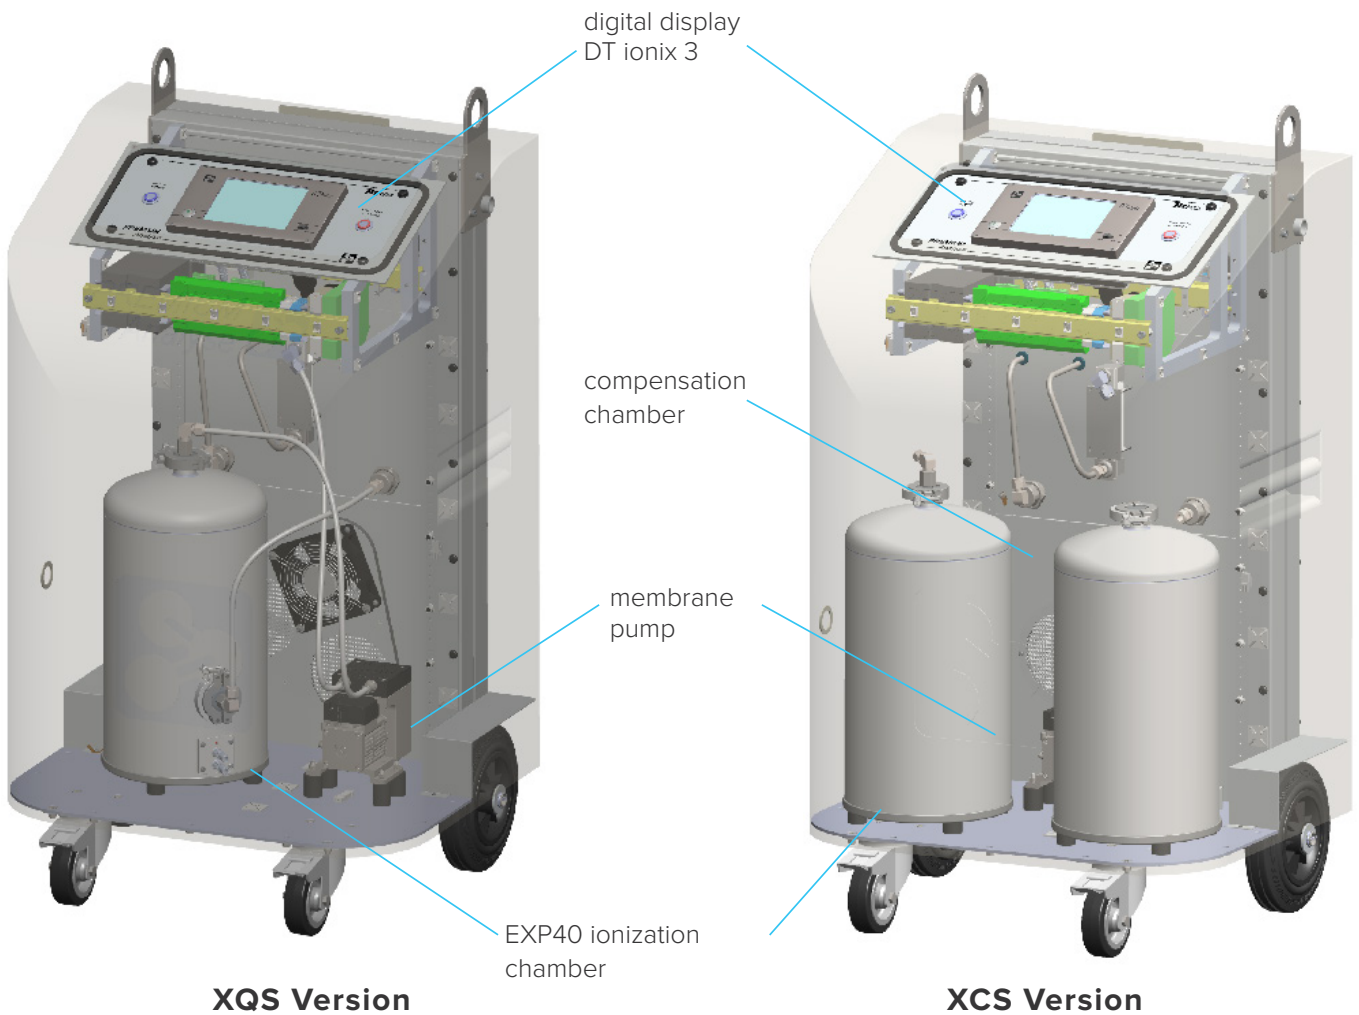

XQS Version


XCS Version

MONITOR CONFIGURATION AND ORDER REFERENCES

Options choice		
Monitor		M IONIX 2 - XQS M IONIX 2 - XCS
Filtration	Anti-dust filter VHE filter	M IONIX 2 - FXS M IONIX 2 - TXS
Measurement TYPE	With flowmeter and simple measurement With flowmeter and compensation chamber	M IONIX 2 - XQS M IONIX 2 - XCS
Pump	Integrated 900L/h pump	M IONIX 2 - XXS
Reference example	M ionix mobile tritium monitor with anti-dust filtration, pump, integrated flowmeter and compensatoin chamber	M IONIX 2 - FCS

Accessories	
Portable alarm beacon	ACC BAL P
Gas connector for 8 mm hose	ACC ARG S08
5 m sampling hose	MIX ACC TUY 05 S
10 m sampling hose	MIX ACC TUY 10 S

Consumables	
M ionix TGN micropump	MIX SP NMP 850
M ionix 2 pump	MX2 SP N838
Maintenance kit for M ionix 2 pump	SP KIT N838
Filtering unit 0.1 µ	SP 90F2005
Ceramic filtering unit 20 µ	SP 90F0007
Teflon filtering unit 2 µ	SP 90F0002
Viton o-ring type 26	SP 90F0040
Vlton o-ring type 36/44 FS/ FSS	SP 90F0048
VHE filtering unit	SP CFL THE
Ventilation filter	SP CFL D120
Axial fan 8 m³/h	SP 412F
Support mounted axial fan 8 m³/h	SP 412F P
Axial fan 170 m³/h	SP 4314

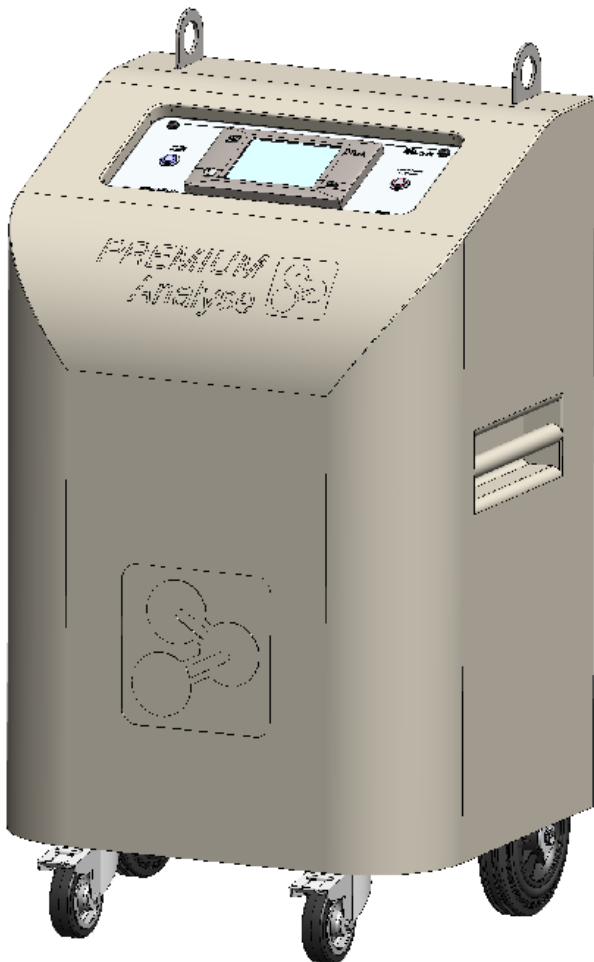

CONTACT US

Mirion Technologies (Premium Analyse)
Téléphone : +33 (0)3 87 51 31 75
Email : contact@premium-analyse.fr

